


## F-925 "Skydrol" RESISTANT SEAL

### TECHNICAL DATA SHEET

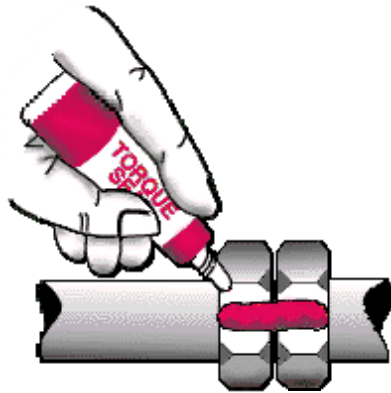

**storage temperature** 40 TO 80F

**relativity humidity**, N/A

**shelf life**, SIX MONTHS FROM DATE OF MANUFACTURE

**flash point** 109F

**labeling, packaging, transport.** UN 1263 PAINT ,CLASS 3 GROUP III

**F-925 "Skydrol" RESISTANT SEAL** An inspection lacquer used in areas where aircraft hydraulic fluid (Skydrol) might come in contact with the seal. A fast drying material that has excellent adhesion to most substrates. It becomes hard and brittle so that visually any movement can be detected. Available in 1/2 oz. squeeze tubes. Color YELLOW and PINK.